

INSTALLATION INSTRUCTIONS
#313 Saddlebags for Moto Guzzi

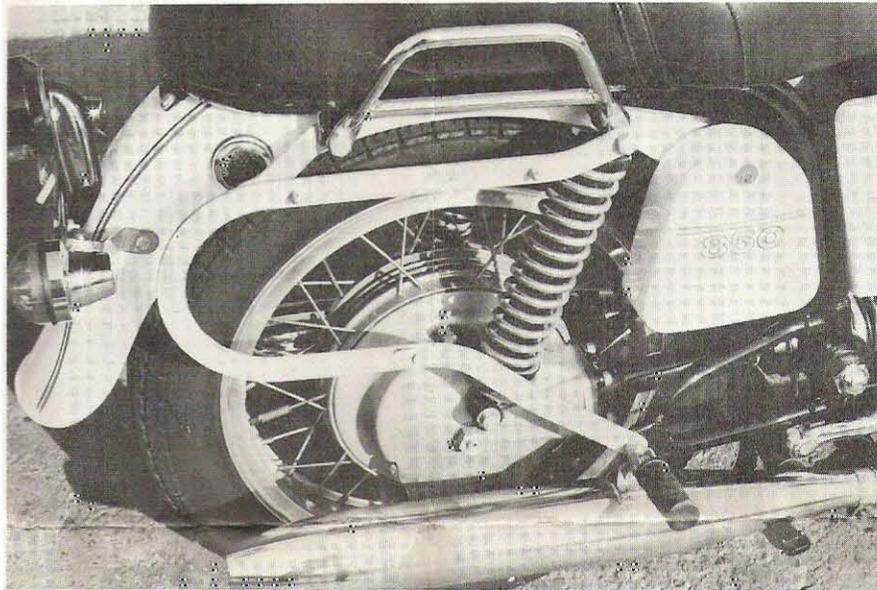


FIGURE # 1

Notes (Ref. Figure #1)

1. Rear support arm goes behind rear seat mounting lug welded to frame
2. Spacer nut (supplied) replaces upper shock mounting nut.
3. Bottom arm of mounts go under passenger peg.
4. The saddlebags are fastened to the mounts via the forked clip at the bottom and the through-pins at the top.
5. It will be necessary to bend the passenger hand rails inward slightly to allow opening of the saddle bag top.

Note: We suggest re-mounting of the rear reflector to the saddlebag or other visible location.

LIGHT WIRING

The ground side of the light is already completed through the saddlebag frame. A pigtail lead on the hot side is provided for attachment to the source of your choice. Note: When installing tail light lenses, moisten the rubber "O" rings on the lights for an easier fit.

CARE AND MAINTENANCE

With the proper care, the impregnated color and finish will outlast the paint on your bike. Use the same waxes and polishes as are used on the rest of the bike. Do not rub wax or polish into the leather grained surface, as it will turn white when it dries.